

HEIZGLASS

Deutsche Qualität

Glass Door System for Cold-rooms

Product description :

Our large selection of door systems provides the flexibility for realizing various reach-in or walk-in solutions in many configurations and sizes.

Meat, dairy products, ice cream or flowers are perfectly visible through the door while the required temperature for the stored goods is maintained.

Optimum insulation properties of the doors support energy efficiency of cold rooms in petrol stations, cash & carry markets and other food retail stores.

A flexible shelving system complements this display door range: chilled and frozen food can be presented in a well arranged, attractive manner.

Take advantage of the benefits :

- ✓ Multiple varieties of door variant
- ✓ Perfectly insulated door for Chiller & Freezer Storage Display
- ✓ Anti-Mist function for Condensation free view of Cold Storage
- ✓ Durable frame and door construction
- ✓ Fully reversible doors
- ✓ Door Stopper for easy loading

Version : HZDQ-112021

HIGH EFFICIENCY AND ENERGY SAVING
COMMERCIAL COLD ROOM

HEIZGLASS

Deutsche Qualität



Heizglass Visual Display :

- Impressive visual impact
- Reliable performance

HEIZGLASS™


Deutsche Qualität

Glass made for Cooling Solution

HEIZGLASS Visual Display™ ----- Glass Made for Cooling Solutions		
Description	Type	Swing Door
	Application	Coldroom or refrigeration cells
	Temperature Range	- Chilled storage +2° to +8° C - Freezer storage -18° to -15° C
System Configuration	Number of doors per frame	1 - 5
	Door Opening	Right / Left
Glass	Chiller applications	Heated double (2) glazing insulated glass
	Freezer applications	Heated triple (3) glazing insulated glass
Standard Dimension (mm)	Glass Door Size	- S = 584mm x 1473mm (23" x 58")
		- H = 584mm x 1801mm (23" x 71")
		- K = 660mm x 1801mm (26" x 71")
		- XL = 762mm x 1801mm (30" x 71")
Handle		- Full Length J Handle (H / K / XL Door) - Aluminium C Handle (S Door)
	Door Opening Features	- Self Closing - Door Stopper
Lighting options		- LED light systems
Price Tag	Type	- PVC Data Strips - Aluminium Price Tag (optional at cost)
		Colors
Colors	Door Frame	- S/Steel SUS304 - Black anodized (optional at cost)
	Mounting Frame	- Black anodized (optional at cost)
Accessories	Shelving System	- Flexi Pillaster Shelf System - Integrated Bracket Shelf System (optional at cost)

Version : HZDQ-112021

Technical Specifications :

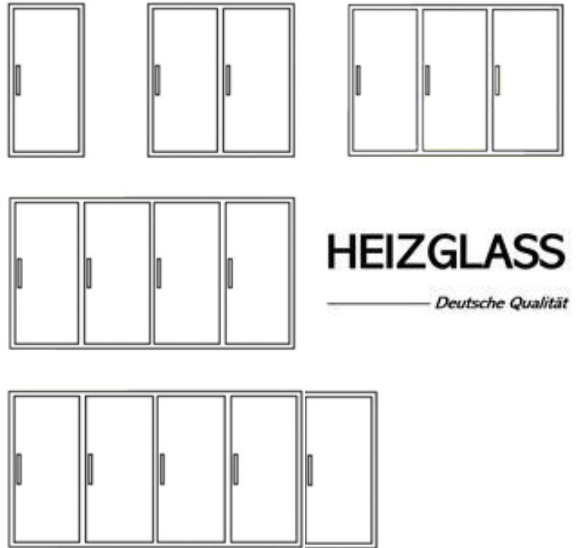

HEIZGLASS

Deutsche Qualität



HEIZGLASS™


Deutsche Qualität
Glass made for Cooling Solution

SPECIFICATIONS - S DOOR		HEIZGLASS Visual Display™
Description	Type	Swing Door
	Application	Coldroom or refrigeration cells
	Temperature Range	- Chilled storage +2° to +8° C - Freezer storage -18° to -15° C
System Configuration	Number of doors per frame	1 - 5
	Door Opening	Right / Left
Glass	Chiller applications	Heated double (2) glazing insulated glass
	Freezer applications	Heated triple (3) glazing insulated glass
Door Dimension (mm)	Glass Door Size	584mm x 1473mm (23" x 58")
Shelving System	Type	Flexi Pillaster shelf system
	Shelving Size	550mm(L) x 572mm(W)
	Pieces (Per Door)	5 pieces
PVC Data Strips	Pieces (Per Door)	5 pieces (550mm)
Handle		- Aluminium C Handle - Full Length J Handle (on request)
	Door Opening Features	- Self Closing - Door Stopper
Lighting		- 4ft White (8000K) LED Light Tube
Colors	Door Frame	- Natural anodized - Black anodized (optional at cost)
	Mounting Frame	- S/Steel SUS 304 - Black anodized (optional at cost)
Accessories	Shelving System	- Flexi Pillaster shelf system - Integrated Bracket shelf system (optional at cost)

HEIZGLASS

Deutsche Qualität

Technical Specifications :

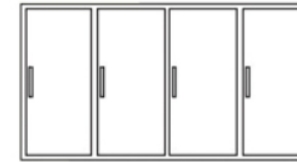

S Door : 23" x 58" Glass Door (Frame Guide)

Frame Panel Hole Measurement (inch) :

- 2 Door Frame : 47.5"(L) x 60"(H)
- 3 Door Frame : 71"(L) x 60"(H)
- 4 Door Frame : 94.5"(L) x 60"(H)
- 5 Door Frame : 118"(L) x 60"(H)

Installation Note :

- Provide allowance of 2/8" - 3/8" for panel hole required for mounting frame installation.
- Operating Environment Under Control Temperature of 25c / 55-60% RH
- Avoid direct Air flow blowing from Evaporator (Blower)

Full Set Parts & Accessories c/w :

S/Steel Mounting Frame, Aluminum Hollow tube, Tube Bracket, Pilasters, 4ft LED Tube, Heavy Duty PVC Coated Shelving with clips.

HEIZGLASS™

Deutsche Qualität

Glass made for Cooling Solution

Version : HZDQ-112021

SPECIFICATIONS - H DOOR		HEIZGLASS Visual Display™
Description	Type	Swing Door
	Application	Coldroom or refrigeration cells
	Temperature Range	- Chilled storage +2° to +8° C - Freezer storage -18° to -15° C
System Configuration	Number of doors per frame	1 - 5
	Door Opening	Right / Left
Glass	Chiller applications	Heated double (2) glazing insulated glass
	Freezer applications	Heated triple (3) glazing insulated glass
Door Dimension (mm)	Glass Door Size	584mm x 1801mm (23" x 71")
	Type	Flexi Pillaster shelf system
Shelving System	Shelving Size	550mm(L) x 572mm(W)
	Pieces (Per Door)	6 pieces
PVC Data Strips	Pieces (Per Door)	6 pieces (550mm)
Handle		- Full Length J Handle - SUS304 Straight handle (on request)
	Door Opening Features	- Self Closing - Door Stopper
Lighting		- 5ft White (8000K) LED Light Tube
Colors	Door Frame	- Natural anodized - Black anodized (optional at cost)
	Mounting Frame	- S/Steel SUS 304 - Black anodized (optional at cost)
Accessories	Shelving System	- Flexi Pillaster shelf system - Integrated Bracket shelf system (optional at cost)

HEIZGLASS

Deutsche Qualität

Technical Specifications :



H Door : 23" x 71" Door Frame Guide

Frame Panel Hole Measurement (inch) :

- 2 Door Frame : 47.5"(L) x 73"(H)
- 3 Door Frame : 71"(L) x 73"(H)
- 4 Door Frame : 94.5"(L) x 73"(H)
- 5 Door Frame : 118"(L) x 73"(H)

Installation Note :

- Provide allowance of 2/8" - 3/8" for panel hole required for mounting frame installation.
- Operating Environment Under Control Temperature of 25c / 55-60% RH.
- Avoid direct Air flow blowing from Evaporator (Blower)

Full Set Parts & Accessories c/w :

S/Steel Mounting Frame, Aluminum Hollow tube, Tube Bracket, Pilasters, 5ft LED Tube, Heavy Duty PVC coated Shelving with clips.

HEIZGLASS™

Deutsche Qualität

Glass made for Cooling Solution


Version : HZDQ-112021

SPECIFICATIONS - K DOOR		HEIZGLASS Visual Display™
Description	Type	Swing Door
	Application	Coldroom or refrigeration cells
	Temperature Range	- Chilled storage +2° to +8° C - Freezer storage -18° to -15° C
System Configuration	Number of doors per frame	1 - 5
	Door Opening	Right / Left
Glass	Chiller applications	Heated double (2) glazing insulated glass
	Freezer applications	Heated triple (3) glazing insulated glass
Door Dimension (mm)	Glass Door Size	660mm x 1801mm (26" x 71")
Shelving System	Type	Flexi Pillaster shelf system
	Shelving Size	615mm(L) x 520mm(W)
	Pieces (Per Door)	6 pieces
PVC Data Strips	Pieces (Per Door)	6 pieces (550mm)
Handle		- Full Length J Handle - SUS304 Straight handle (on request)
	Door Opening Features	- Self Closing - Door Stopper
Lighting		- 5ft White (8000K) LED Light Tube
Colors	Door Frame	- Natural anodized - Black anodized (optional at cost)
	Mounting Frame	- S/Steel SUS 304 - Black anodized (optional at cost)
Accessories	Shelving System	- Flexi Pillaster shelf system - Integrated Bracket shelf system (optional at cost)

HEIZGLASS

Deutsche Qualität

Technical Specifications :

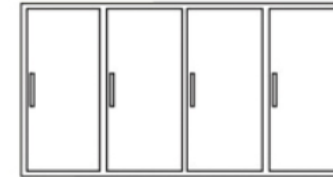

K Door : 26" x 71" Glass Door (Frame Guide)

Frame Panel Hole Measurement (inch) :

- 2 Door Frame : 53.5"(L) x 73"(H)
- 3 Door Frame : 80"(L) x 73"(H)
- 4 Door Frame : 106.5"(L) x 73"(H)
- 5 Door Frame : 133"(L) x 73"(H)

Installation Note :

- Provide allowance of 2/8" - 3/8" for panel hole required for mounting frame installation.
- Operating Environment Under Control Temperature of 25c / 55-60% RH.
- Avoid direct Air flow blowing from Evaporator (Blower)

Full Set Parts & Accessories c/w :

S/Steel Mounting Frame, Aluminum Hollow tube, Tube Bracket, Pilasters, 5ft LED Tube, Heavy Duty PVC coated Shelving with clips.

HEIZGLASS™

Deutsche Qualität

Glass made for Cooling Solution


Version : HZDQ-112021

SPECIFICATIONS - XL DOOR		HEIZGLASS Visual Display™
Description	Type	Swing Door
	Application	Coldroom or refrigeration cells
	Temperature Range	- Chilled storage +2° to +8° C - Freezer storage -18° to -15° C
System Configuration	Number of doors per frame	1 - 5
	Door Opening	Right / Left
Glass	Chiller applications	Heated double (2) glazing insulated glass
	Freezer applications	Heated triple (3) glazing insulated glass
Door Dimension (mm)	Glass Door Size	760mm x 1801mm (30" x 71")
	Type	Flexi Pillaster shelf system
Shelving System	Shelving Size	710mm(L) x 572mm(W)
	Pieces (Per Door)	6 pieces
PVC Data Strips	Pieces (Per Door)	6 pieces (700mm)
Handle		- Full Length J Handle - SUS304 Straight handle (on request)
	Door Opening Features	- Self Closing - Door Stopper
Lighting		- 5ft White (8000K) LED Light Tube
Colors	Door Frame	- Natural anodized - Black anodized (optional at cost)
	Mounting Frame	- S/Steel SUS 304 - Black anodized (optional at cost)
Accessories	Shelving System	- Flexi Pillaster shelf system - Integrated Bracket shelf system (optional at cost)

HEIZGLASS

Deutsche Qualität

Technical Specifications :

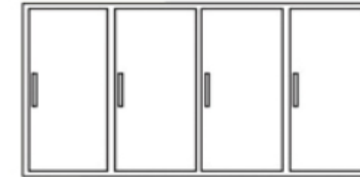

XL Door : 30" x 71" Glass Door (Frame Guide)

Frame Panel Hole Measurement (inch) :

- 2 Door Frame : 61.5"(L) x 73"(H)
- 3 Door Frame : 92"(L) x 73"(H)
- 4 Door Frame : 122.5"(L) x 73"(H)
- 5 Door Frame : 153"(L) x 73"(H)

Installation Note :

- Provide allowance of 2/8" - 3/8" for panel hole required for mounting frame installation.
- Operating Environment Under Control Temperature of 25c / 55-60% RH.
- Avoid direct Air flow blowing from Evaporator (Blower)

Full Set Parts & Accessories c/w :

S/Steel Mounting Frame, Aluminum Hollow tube, Tube Bracket, Pilasters, 5ft LED Tube, Heavy Duty PVC coated Shelving with clips.

HEIZGLASS™

Deutsche Qualität

Glass made for Cooling Solution

Version : HZDQ-112021