

**PRIMEO**™  
— Cooling Simplified —

“WE ONLY PRODUCE  
GOOD QUALITY FREEZER”

**PRIMEO**  
— Cooling Simplified —

**CHOOSE  
ONE  
YOU WANT!**





# CHEST FREEZER

## HARD DOOR

PFQ08S-S1Y (200 Litre)



**PRIMEO**  
Cooling Simplified



### Specifications

Capacity(L): 157  
Temperature°C: ≤ -18°C

### Keyfeature

Climate: N/ST/T  
Refrigerant: R600a/R134a  
Approval: CE, CB

### Dimensions

Net W\*D\*H(mm): 814x560x830  
Packing W\*D\*H(mm): 850x580x883

PFQ16S-S2Y (600 Litre)

**PRIMEO**  
Cooling Simplified



### Specifications

Capacity(L): 520  
Temperature°C: ≤ -18°C

### Keyfeature

Climate: N/ST/T  
Refrigerant: R134a/R290  
Approval: CE, CB

### Dimensions

Net W\*D\*H(mm): 1600x760x827  
Packing W\*D\*H(mm): 1650x775x868



STEPPED  
BASEMENT DESIGN  
FOR LARGER VOLUME



Stepped  
basement  
design



A++  
A++  
Energy  
Efficient



High efficiency  
compressor





## STEPPED BASEMENT DESIGN WITH BETTER APPEARANCE



Curved  
Glass Door



One-piece  
frame



High efficiency  
compressor



## PFQ10S-L2Y (300 Litre)

**PRIMEO**  
Cooling Simplified

### Features

- Lock&Key
- Outside/Inside condenser
- Mechanical temperature control
- Big freezing capacity
- Water disposal device
- Power indicator function

### Customized specifications

Power optional:

115/60HZ  220-240V/50HZ  220V/60HZ

Refrigerant optional:


R134a  R600a

### Other optional

- Copper pipe
- Color sticker
- Storage basket
- Fan

### Color optional

White  Gold  Silver  Blue  Others

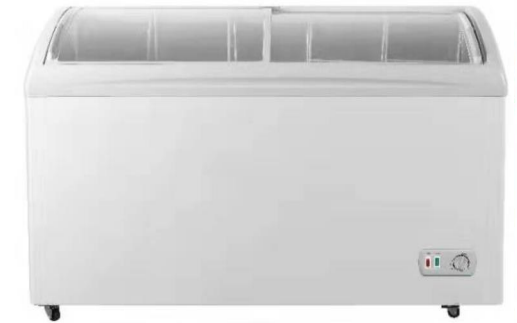

### Parameter

Model No.	Capacity	Freezing/freshing temperature	Loading Qty(40HQ)	Net/Gross weight(kg)	Product size(mm)	Packing size(mm)
SD/SC-258Y	258	<-18℃ 0-10℃	108PCS	50/58	1094×596×830	1145×650×870

## PFQ12S-L2Y (400 Litre)

**PRIMEO**  
Cooling Simplified

### Features

- Lock&Key
- Outside/Inside condenser
- Mechanical temperature control
- Big freezing capacity
- Water disposal device
- Power indicator function

### Customized specifications

Power optional:

115/60HZ  220-240V/50HZ  220V/60HZ

Refrigerant optional:


R134a  R600a

### Other optional

- Copper pipe
- Color sticker
- Storage basket
- Fan

### Color optional

White  Gold  Silver  Blue  Others

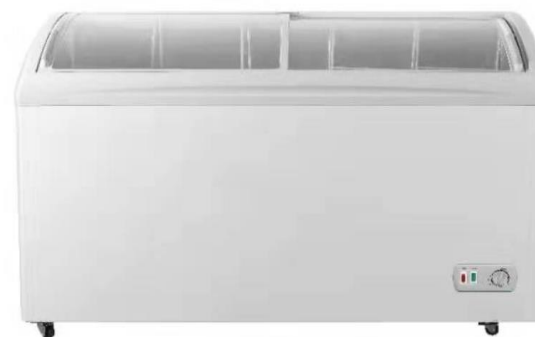

### Parameter

Model No.	Capacity	Freezing/freshing temperature	Loading Qty(40HQ)	Net/Gross weight(kg)	Product size(mm)	Packing size(mm)
SD/SC-318Y	318	<-18℃ 0-10℃	78PCS	58/64	1294×596×830	1350×650×870

# SHOWCASE FREEZER



# SHOWCASE FREEZER



PFQ16P-L2Y (600 Litre)



### Specifications

Capacity(L): 516  
Temperature°C:  $\leq -18^{\circ}\text{C}$

### Keyfeature

Climate: N/ST/T  
Refrigerant: R134a/R290  
Approval: CE,CB,ETL

### Dimensions

Net W\*D\*H(mm): 1634x653x900  
Packing W\*D\*H(mm): 1680x720x880



Inner LED Lamp Available



Temperature Display Available



## PFQ16S-C2Y (700 Litre)

### Features

- Mechanical temperature control
- Big freezing capacity
- Water disposal device
- Power indicator function

### Customized specifications

- Power optional:  
 115/60Hz  220-240V/50Hz  220V/60Hz  
 Refrigerant optional:  
 R134a  R600a

### Other optional

- Copper pipe
- LED digital display
- Storage basket

### Color optional

- White  Gold  Silver  Blue  Others



### Parameter

Model No.	Capacity	Freezing/Storage temperature	Loading Q (kg/24h)	Net/Gross weight	Product size (mm)	Packing size (mm)
SDSC-1658	700L	-6~-18℃ -18~-18℃	30PCS	75/100	1150-650-150	1000-615-110

## SUPER DEEP FREEZING



-36°C deep freezing



A++ Energy Efficient



High efficiency compressor



## PFQ21S-C2Y (800 Litre)



### Features

- Mechanical temperature control
- Big freezing capacity
- Water disposal device
- Power indicator function

### Customized specifications

- Power optional:  
 115/60Hz  220-240V/50Hz  220V/60Hz  
 Refrigerant optional:  
 R134a  R600a

### Other optional

- Copper pipe
- LED digital display
- Storage basket

### Color optional

- White  Gold  Silver  Blue  Others

### Parameter

Model No.	Capacity	Freezing/Storage temperature	Loading Q (kg/24h)	Net/Gross weight	Product size (mm)	Packing size (mm)
SDSC-2108	750L	-6~-18℃ -18~-18℃	30PCS	119/141	2100-650-150	2140-615-110